


DIMENSIONES Y REFERENCIAS ESLABONES FUSIBLES tipo K

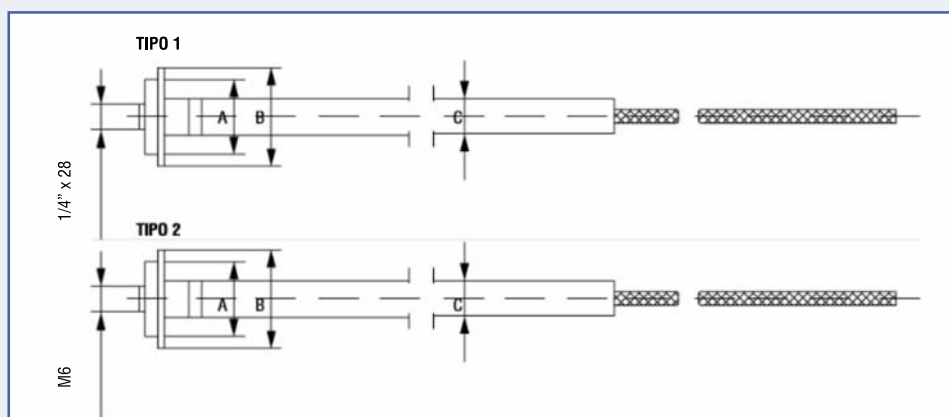

INTENSIDAD	A	B	C
<50	12,5	19	7,9
>50	19	No lleva	10,9
>100	25,4	“	11,7
>140	25,4	“	14,3

AMP *	REFERENCIAS	
	TIPO 1	TIPO 2
6	M6KA23	M6K/24/6
10	M10KA23	M10K/24/10
20	M20KA23	M20K/24/20
25	M25KA23	M25K/24/25
40	M40KA23	M40K/24/40
50	M50KA23	M50K/24/50
80	M80KA23	M80K/24/80
100	M100KA23	M100K/24/100

* OTRAS INTENSIDADES BAJO DEMANDA

AMP *	REFERENCIAS	
	TIPO 1	TIPO 2
1	M1KA23	
2	M2KA23	
3	M3KA23	
8	M8KA23	
12	M12KA23	
15	M15KA23	
30	M30KA23	
65	M65KA23	
140	M140KA23	
200	M200KA23	

SELECCION DEL ESLABON FUSIBLE TIPO K PARA LA PROTECCION DE LOS TRANSFORMADORES

Tensión Servicio kV	10		15		20		25		30	
Potencia kVA	In. Transfo. A	In. Fusible A	In. Transfo. A	In. Fusible A	In. Transfo. A	In. Fusible A	In. Transfo. A	In. Fusible A	In. Transfo. A	In. Fusible A
10	0,58	1	0,38	1	0,29	1	0,23		0,19	
20	1,15	2	0,77	1	0,58	1	0,46	2	0,38	1
25	1,44	2	0,96	2	0,72	1	0,58	2	0,48	1
50	2,89	6	1,92	2	1,44	2	1,15	2	0,96	2
75	4,33	6	2,89	3	2,17	3	1,73	4	1,44	2
100	5,77	8	3,85	6	2,89	6	2,31	4	1,92	3
160	9,24	12	6,16	6	4,62	8	3,70	6	3,08	5
200	11,55	15	7,70	10	5,77	8	4,62	10	3,85	5
250	14,43	20	9,62	15	7,22	10	5,77	10	4,81	8
400	23,09	40	15,40	25	11,55	20	9,24	20	7,70	15
500	28,87	50	19,25	30	14,43	20	11,55	20	9,62	15
630	36,37	65	24,25	40	18,19	30	14,55	25	12,12	20
800	46,19	80	30,79	65	23,09	40	18,48	32	15,40	25
1000	57,74	100	38,49	65	28,87	50	23,09	40	19,25	30
1250	72,17	140	48,11	100	36,08	65	28,87	50	24,06	40