




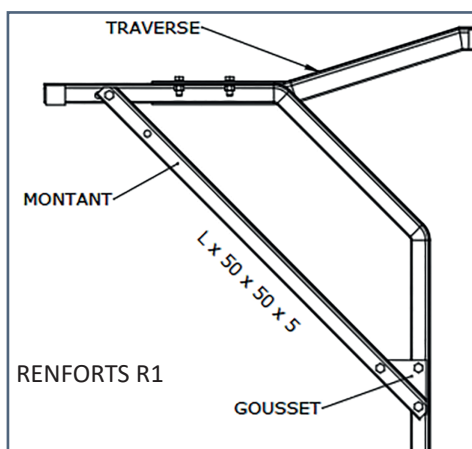

ARMEMENT NAPPE-VOÛTE POUR ISOLATEURS RIGIDES NVR1, NVR2, NVR3

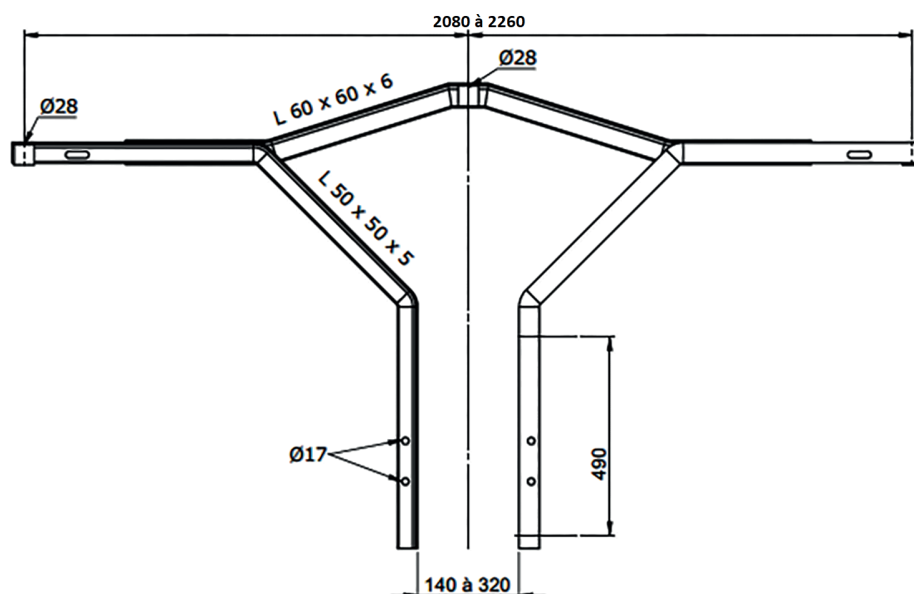

➤ Montage support simple

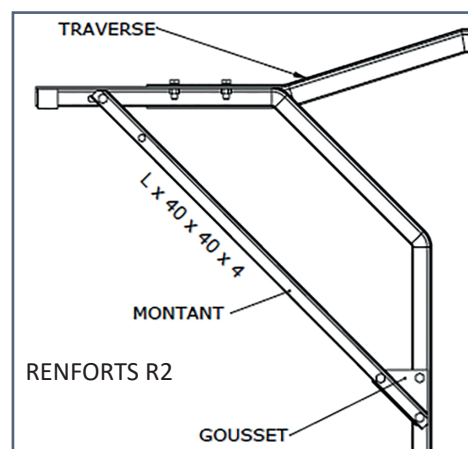

Référence	Codet	Composition	Codet	Effort nominal* (daN)		Poids (Kg)
				L	H	
NVR1	68 53 325	1 traverse T 2 montants M 4 BH1440 + 4 MG14	68 53 329 68 53 330 -	80	80	24.5
NVR2	68 53 326	1 traverse T 2 montants M 2 renforts R1 + 2G 12 BH1440 + 4 MG14	68 53 329 68 63 330 68 53 331 -	160	130	35
NVR3	68 53 327	1 traverse T 2 montants M 4 renforts R2 + 2G 12 BH1440 + 4 MG14	68 53 329 68 53 330 68 53 332 -	200	210	37

* Les efforts sont donnés en nominal. Effort en limite élastique : 1,6.

OPTION :

➤ Montage sur supports jumelés 350 à 650 mm